



NOTE:
CONTRACTION JOINT REQUIRED
AT BOTH SIDES OF DRIVEWAY
AND OVER ROOF DRAINS

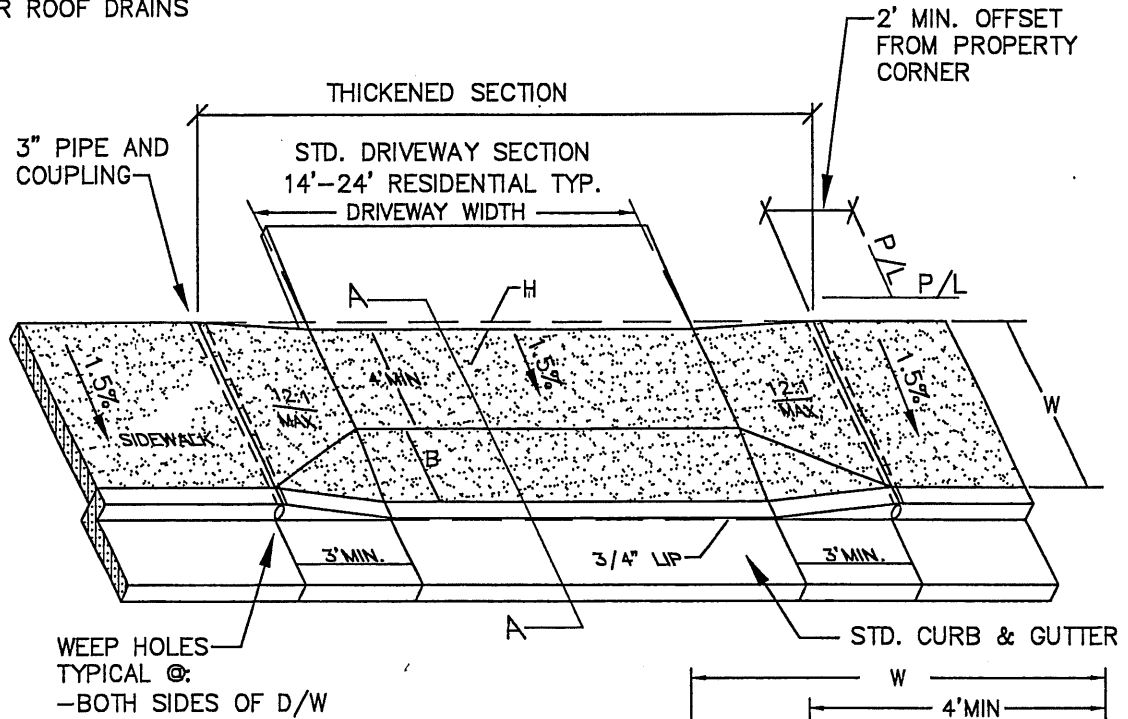

W	B	H	
5'	1'	0.27'	(3-1/4")
6'	2'	0.23'	(2-3/4")
7'	3'	0.19'	(2-1/4")

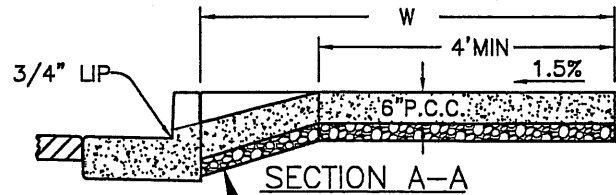

MIN. 4" OF 3/4"-0" COMPACTED
GRANULAR BASEROCK (TYPICAL
UNDER ALL SIDEWALKS AND
DRIVEWAYS)

NOTES:

1. SEE DETAIL 212 FOR STANDARD APRON & SIDEWALK DETAILS. USE OF THIS DETAIL REQUIRES SPECIFIC APPROVAL BY PUBLIC WORKS PRIOR TO FORMING.
2. CONCRETE DEPTH FOR STANDARD SIDEWALKS SHALL BE 4" MIN.
3. SF & DUPLEX RESIDENTIAL DRIVEWAY SECTIONS INCLUDING SIDEWALKS THROUGH DRIVEWAYS SHALL BE 6" MIN. THICKNESS.
4. CONCRETE SHALL BE 3300 PSI @ 28 DAYS.
5. PCC APRONS SHALL BE JOINTED TO MATCH SIDEWALK PATTERN.
6. PUBLIC SIDEWALKS SHALL BE LOCATED ENTIRELY WITHIN RIGHT-OF-WAY OR SIDEWALK EASEMENTS, INCLUDING SIDEWALKS THROUGH DRIVEWAY APRONS & AT CORNERS.
7. CROSS SLOPE IS MEASURED FROM HORIZONTAL.
8. RUNNING SLOPE OF SIDEWALK APPROACH TO LANDINGS SHALL TYPICALLY NOT EXCEED 1V:12H (8.33%), BUT SHALL NOT REQUIRE THE LENGTH TO EXCEED 15 FEET.

LAST REVISION DATE: JULY 2015	
RESIDENTIAL D/W APRON CURBLINE SIDEWALK UPHILL LOTS ONLY (NTS)	
SILVERTON, OR	DETAIL NO. 212A