


NOTE:

UTILITIES FOR 3/4 STREET IMPROVEMENTS OR EXISTING TURNPIKE STREETS SHALL BE LOCATED TO ALLOW FUTURE CONSTRUCTION OF CURBED STREETS WITHOUT RELOCATING UTILITIES. SEE DETAIL 101.

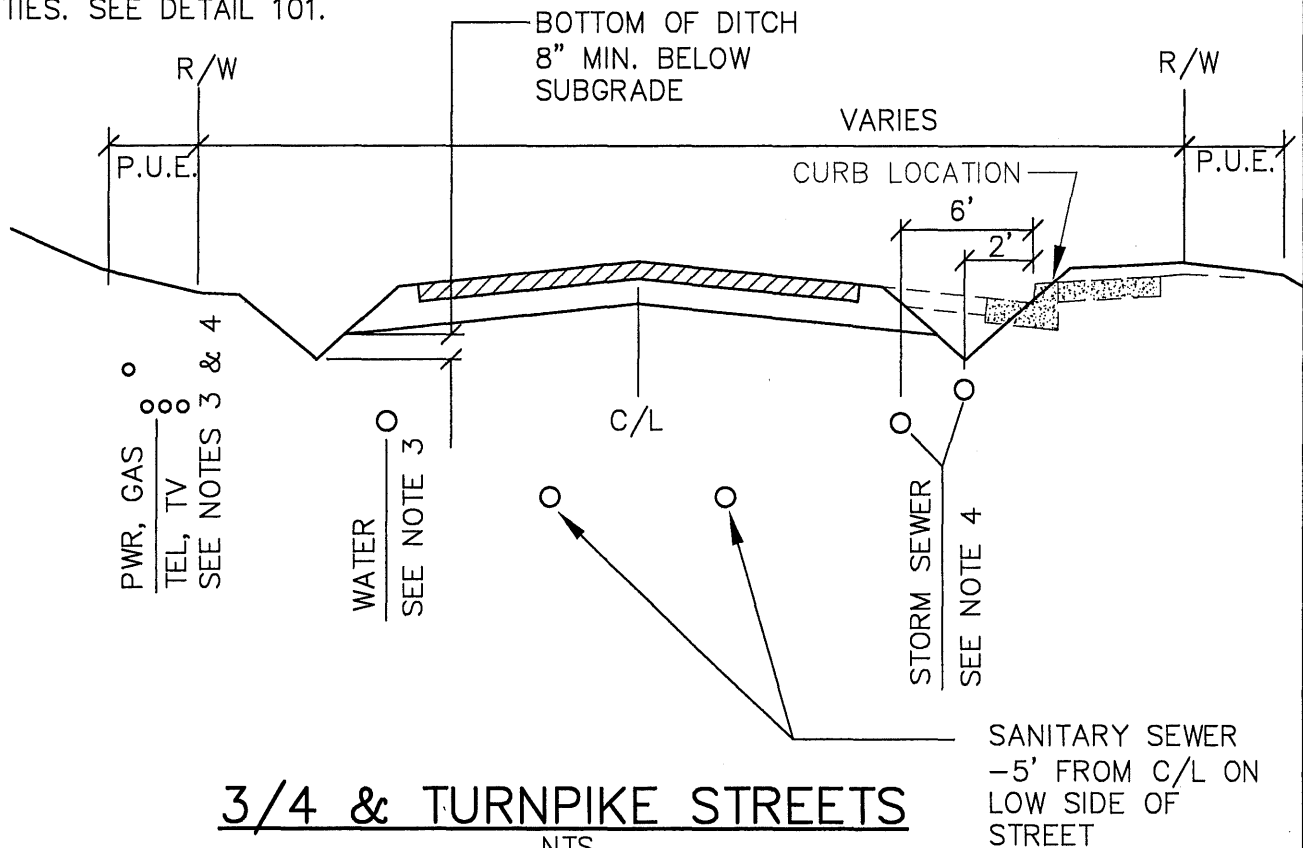

3/4 & TURNPIKE STREETS
NTS

NOTES:

1. 6' MIN COVER REQUIRED FOR SANITARY SEWER MAINS (4' MIN. COVER TYPICALLY REQUIRED FOR LATERALS).
2. LATERALS AND P/L CLEANOUTS TO BE INSTALLED DURING CONSTRUCTION OF SANITARY SEWER & STORM MAINS (TO AVOID FUTURE STREET CUTS).
3. WATER TO BE INSTALLED ON HIGH SIDE OF STREET, 3' IN FRONT OF FACE OF CURB ON IMPROVED SIDE OR 3' IN FRONT OF FUTURE FACE OF CURB LOCATION, UNLESS OTHERWISE REQUIRED BY THE PUBLIC WORKS DIRECTOR. 10' MINIMUM SEPARATION TYPICAL BETWEEN PARALLEL WATER & SEWER MAINS.
4. FOR 3/4 STREETS, STORM SEWER TO BE INSTALLED ON IMPROVED SIDE OF STREET, UNLESS OTHERWISE REQUIRED BY THE PUBLIC WORKS DIRECTOR:
 - a) 2' FROM FACE OF CURB FOR <4' RIM TO INVERT
 - b) 6' FROM FACE OF CURB FOR >4' RIM TO INVERT (MH SYSTEM)
5. MAINTAIN MIN. 3' HORIZ. SEPARATION BETWEEN PUBLIC UTILITIES & PARALLEL PRIVATE UTILITIES. OTHER VERTICAL AND HORIZONTAL SEPARATION DISTANCES SHALL BE AS SPECIFIED BY DEQ, ODWP, OR OTHER PUBLIC/PRIVATE UTILITY COMPANIES.
6. UNITY TRENCH PER UTILITY COMPANY REQUIREMENTS, GENERALLY ON THE OPPOSITE SIDE OF STREET FROM WATER LINE WHERE FEASIBLE.

LAST REVISION DATE: JAN 2016	COPYRIGHT 1996 WESTECH ENGINEERING, INC.
TYP. UTILITY LOCATIONS (TURNPIKE AND 3/4 STREETS)	
(NTS)	
SILVERTON, OR	DETAIL NO. 102