


TYPE 'C' CURB

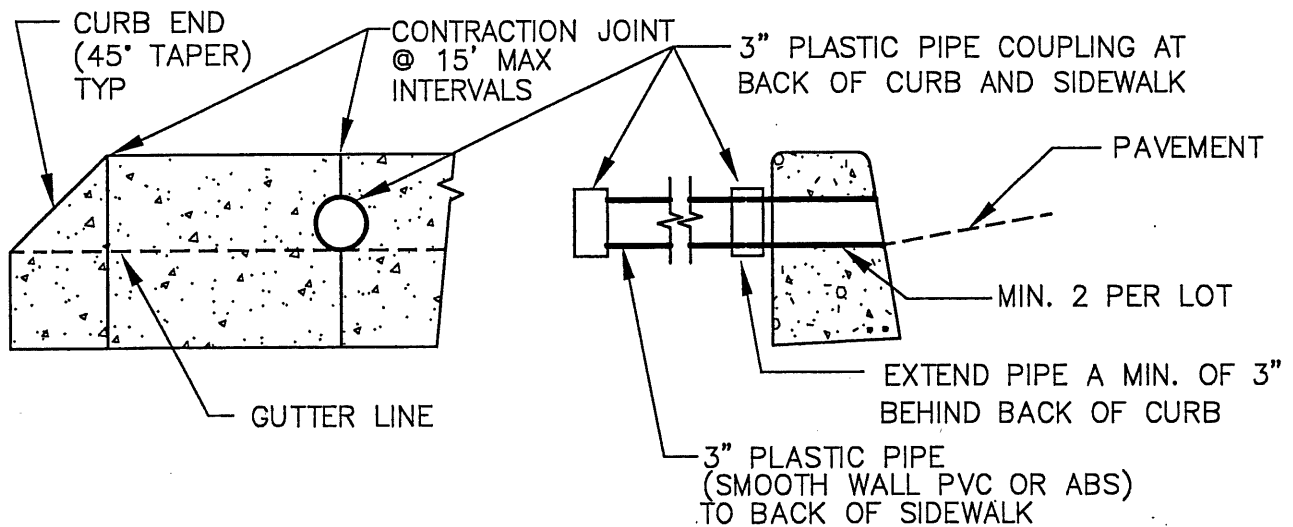

WEEP HOLE THROUGH CURB

NOTES

1. 7" CURB EXPOSURE FOR ARTERIAL & COLLECTOR STREETS WHERE TYPE C CURB ALLOWED.
6" EXPOSURE ALL OTHER PUBLIC STREETS, PRIVATE STREETS & PARKING LOTS.
2. A CONTRACTION JOINT SHALL BE PLACED ALONG AND OVER WEEP HOLE THROUGH THE SIDEWALK.
3. ALL CONCRETE SHALL BE 3300 PSI @ 28 DAYS.
4. WHERE SIDEWALKS ARE TO BE CONSTRUCTED, EXTEND 3" PIPE TO BACK OF SIDEWALK LOCATION & INSTALL COUPLING.
5. INSTALL MIN. 2 WEEP HOLES ON ALL LOTS. ONE WEEP HOLE TO BE AT LOW END OF LOT FRONTAGE, 5' FROM P/L.
6. WEEP HOLES IN EXISTING CURBS SHALL BE CORE DRILLED.

LAST REVISION DATE: JULY 2015	COPYRIGHT 1996 WESTECH ENGINEERING, INC.
TYPE 'C' CURB AND WEEPHOLE	
(NTS)	
SILVERTON, OR	DETAIL NO. 211